

Tube Series

T8 PLUG & PLAY
Ballast compatible

- *Compatibility: Electronic instant start, programmed start, rapid start ballast; Dimming ballast and Emergency ballast.
- *Full glass housing: no bending, nonflammable, good thermal, excellent optical
- *Superior diffusion coating: durable, uniform, no yellowing
- *Strong glass and end-form design to minimize risk of breakage
- *Fully-automated production to ensure quality consistency
- *Strong IP portfolio
- *Application: Office, School, Supermarket, Parking garage, Airport, Warehouse etc.



PRODUCT

- Watts: 9/13/15
- Lumens: 1300/1800/2000lm
- CRI: 83
- CCT: 3000/3500/4000/5000K
- Beam angles: 180°
- Efficiency: 110 LPW


FEATURES

- Warranty: 5 years
- Voltage: -
- Dimming: 0-10V dimming
- Classifications: Damp Rated
- Operating Temp: - 4 to 104 °F


Tube Series

T8 PLUG & PLAY
Ballast compatible

CANDELA DISTRIBUTION

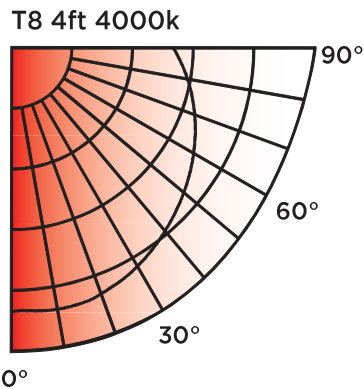


4ft Size: 1213*27.5
PF: 0.9

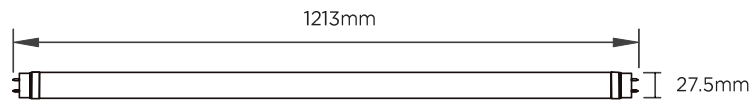

Technical Specification

T8 • PLUG & PLAY • 1300/1800/2000lm

Type	Voltage (v)	Wattage (w)	Light output (lm)	Color temp. (k)	CRI (Ra)	Water proof rating	Beam angle Δ	Dimmable ⊙		SKU Code
T8 2ft DR	--	9	1300	3000	83	DAMP	180	0-10V Dim	--	--
T8 2ft DR		9	1300	3500	83	DAMP	180	0-10V Dim		
T8 2ft DR		9	1300	4000	83	DAMP	180	0-10V Dim		
T8 2ft DR		9	1300	5000	83	DAMP	180	0-10V Dim		
T8 4ft DR		13	1800	3000	83	DAMP	180	0-10V Dim		
T8 4ft DR		13	1800	3500	83	DAMP	180	0-10V Dim		
T8 4ft DR		13	1800	4000	83	DAMP	180	0-10V Dim		
T8 4ft DR		13	1800	5000	83	DAMP	180	0-10V Dim		
T8 4ft DR		15	2000	3000	83	DAMP	180	0-10V Dim		
T8 4ft DR		15	2000	3500	83	DAMP	180	0-10V Dim		
T8 4ft DR		15	2000	4000	83	DAMP	180	0-10V Dim		
T8 4ft DR		15	2000	5000	83	DAMP	180	0-10V Dim		